

GRAIN STORAGE.

HANDLED.

GRAIN STORAGE | GRAIN HANDLING



GRAIN HANDLING
FANS & AERATION
GRAIN STORAGE

Table of Contents

GRAIN STORAGE	1	GRAIN HANDLING	15
Corrugated Flat Bottom - Meridian	2	Truck Auger - AGI Westfield	16
Corrugated Flat Bottom - AGI Westeel	3	Truckload Auger - Meridian	17
Corrugated Hopper Combo - Meridian	4	U-Trough Auger - AGI Westfield	18
Corrugated Hopper Combo - AGI Westeel	5	Swing Auger - AGI Westfield	19
Smoothwall - Meridian	6	Swing Auger - Meridian	20
Smoothwall	7	EMD Augers - AGI Westfield	21
Grain Bags & Covers	8	Auger Accessories	22
		Conveyor - Meridian	23
		Conveyor - AGI Batco	24
FANS & AERATION	9	Seed Treater - AGI Westfield	25
Fan - Grain Guard	10		
Fan recommendation guideline	11	NOTES	26
Heater - Grain Guard	12		
Heater recommendation guideline	13		
Rocket - Grain Guard	14		



MERIDIAN

GRAIN STORAGE



CORRUGATED FLAT BOTTOM Meridian

Product: Flat Bottom

Meridian's 5" corrugated wall sheets allow for a wider 47" sheet increasing the overall capacity of the bin compared to other bin manufacturers. Meridian's 40" diameter bin lid and remote bin lid opener makes accessing the bin lid with the auger quick and easy. Roof with a 30° slope and extra high ribs for added strength.



STANDARD OFFERING:

- 5" corrugation
- 30° roof
- 40" diameter bin lid
- 4 - 16" diameter roof vents
- Roof inspection hatch
- 5" corrugated wall sheets
- Spiral staircase
- Temp cables
- Three-panel walk-in door
- Full floor aeration (.050 perf)
- Welded steel floor supports
- 11" U-trough unload (10 hp motor)
- 7.25" bin sweep
- Life span 20-plus years

MODEL	TIERS	CAPACITY	HEIGHT TO EAVES (FT.)	HEIGHT TO FILL CAP (FT.)	SWING AUGER REQUIREMENTS	TRUCK LOAD AUGER REQUIRED	STIFFENED/ UNSTIFFENED
Meridian 3607	7	24552	26.6'	36.7'	79'	10 x 41	Unstiffened
Meridian 3609	9	31928	34.1'	44.2'	85'	10 x 41	Stiffened

No changes on standard packages other than power requirements. All other sizes ordered on special order.

CORRUGATED FLAT BOTTOM AGI Westeel

Product: Flat Bottom

This bin is engineered for superior strength and exceptional clean-out, utilizing heavy gauge, ultra-flat corrugated steel. Westeel flat bottom bins are tested for all weather conditions around the world.



STANDARD OFFERING:

- 4" corrugation
- 52" diameter bin lid
- Full floor aeration (.050 perf)
- Lock 'n' load floor supports
- Easy flow 2 SD U-trough with emergency sump
- 7 hp inline fan, single phase 230V
- Common translet and faceplate for fan
- Fan support stand
- 2 x round roof vents
- Inside ladder
- Spiral staircase with tier platform
- Life span 20-plus years

MODEL	TIERS	CAPACITY	HEIGHT TO EAVES (FT.)	HEIGHT TO FILL CAP (FT.)	SWING AUGER REQUIREMENTS	TRUCK LOAD AUGER REQUIRED	STIFFENED/ UNSTIFFENED
3607	7	24750	25.8'	35.5'	79'	13 x 41	Unstiffened

No changes on standard packages other than power requirements. All other sizes ordered on special order.

CORRUGATED HOPPER COMBO Meridian

Product: Hopper Packages

Meridian's 5" corrugated wall sheets allow for a wider 47" sheet increasing the overall capacity of the bin compared to other bin manufacturers.

Meridian's 27" diameter bin lid and remote bin lid opener makes accessing the bin lid with the auger quick and easy. The 30° sloped bin roof has extra high ribs for added strength and the 35° hopper cone has a rack and pinion slide gate quick and easy unloading.

STANDARD OFFERING:

- 30° bin roof
- 27" diameter bin lid
- Roof inspection hatch
- 5" corrugated wall sheets
- Sidewall ladder (with no cage)
- Roof ladder c/w side hand rail
- Levalert - grain level gauge
- 35° hopper cone
- Rack & pinion slide gate
- Double or triple skid
- Powder coated paint finish
- Movable (15' & 18' diameter)



MODEL	BUSHEL	CONE (DEGREE)	HORIZONTAL AIR	LEVEL ALERT	VERTICAL AIR	VENT	FAN (HP)	TEMP CABLE	FAN STAND	RECOMMENDED AUGER
1505	3342	40	N	Y	N	0	N	N	N	59'
1806	5690	35	Y	Y	Y	2	5 FC	Y	Y	66'
2106	7914	35	Y	Y	Y	3	7 FC	Y	Y	72'

No changes on standard packages other than power requirements. All other sizes ordered on special order.

CORRUGATED HOPPER COMBO AGI Westeel

Product: Hopper Packages

All Westeel 4" corrugated Seedstor bins are professionally engineered to provide optimum structural integrity from top to bottom.

The Westeel Elite Hopper Cone has been specifically engineered to provide optimum support for your Westeel Wide-Corr bin, thus protecting your investment and ensuring decades of worry-free operation.



STANDARD OFFERING:

- Outside ladder and safety cage
- Westeel Elite welded hopper cone with foundation
- Grain Guard aeration fan
- Grain Guard Rocket or horizontal air tube
- Galvanized roof vents
- Skid
- Life span 20-plus years

MODEL	BUSHEL	CONE (DEGREE)	HORIZONTAL AIR	LEVEL ALERT	VERTICAL AIR	VENT	FAN (HP)	TEMP CABLE	FAN STAND	RECOMMENDED AUGER
1506 Westeel	3750	35	Y	N	N	3	5 hp inline	N	N	51'
1806 Westeel	5520	35	N	N	Y	3	5 hp inline	Y	Y	63'
2106 Westeel	7690	35	N	N	Y	3	7.5 hp FC	Y	Y	63'
2406 Westeel	10273	35	N	N	Y	4	10 hp FC	Y	Y	73'

SMOOTHWALL Meridian

Product: Smoothwall Bin

Meridian provides a number of storage solutions for farm applications including Grain Max, Multi-Purpose and Feed bins. Grain Max is comparable to corrugated hopper bins without bolt or ribs. Its seamless design allows for safer and easier unload. The heavier multi-purpose offers versatility for feed, fertilizer, seed and grain. Powder coated for better clean-out.

STANDARD OFFERING:

- Superior self clean-out
- No entry concerns
- Versatile for multi uses
- Can be placed on gravel or concrete pad
- Life span 40-plus years
- Manway
- Bin lid opener
- View glass x 3

No changes on standard packages other than power requirements. All other sizes ordered on special order.



SMOOTHWALL

UFA STANDARD PACKAGES:

ARTICLE	MODEL	POKE HOLE	MANHOLE	VENT	SKID* SOLD SEPARATELY	SKID ARTICLE	BIN HEIGHT	AUGER LENGTH	BUSHEL CAPACITY
1087922	MP 1620	Y	N	N	16d5	862551	34'	61'	4119
314859	MP1412	Y	N	N	14s7	862472	25'	46'	2066
1087923	MP 1625	Y	N	N	16d7	862560	39'	71'	4973
1087915	GM2300	N	N	N	14S7	862472	27'	46'	2301
1093297	GM4000 with Manhole	N	Y	Y	16d5	862551	34'	66'	4199
1087918	GM4000	N	N	Y	16d5	862551	34'	66'	4199
1098119	GM 4000 with Air/Manhole	N	Y	N	16d5	862551	34'	66'	4199
1098118	GM4000 with Air	N	N	Y	16d5	862551	34'	66'	4199
1087920	GM5000	N	N	N	16d5	862551	34'	66'	4973

GRAIN BAGS & COVERS

Product: Temporary Storage

Ag Flex represents the best-in-field storage solution. Features a seven-layer smart structure technology. New technology provides increased strength, puncture and tear resistance, and provides peace of mind when storing product.

STANDARD GRAIN BAG OFFERING:

- Readily available in times of excess grain production
- Minimal investment compared to permanent storage
- Portable: can be placed in locations of choice
- Holds grain air tight
- Can hold up to 35,000 bushels
- Provides cost effective storage on rented land
- Simple short-term storage
- Medium maintenance

Other sizes available upon request.



ARTICLE	SIZE
1077620	9' x 250'
1133592	9' x 300'
1087938	10' x 250'
1087936	10' x 300'
1122085	10' x 400'
1133592	10' x 500'
1131993	10' x 500'
1122086	12' x 500'

FANS & AERATION



ROCKET
HUNT & SUPPLY

GRAN GUARD

FAN Grain Guard

Product: Fan

Grain Guard has established aeration and conditioning equipment to assist you in managing your grain storage. With more than 100,000 fans in operation, Grain Guard remains the leader in aeration fan design.

CENTRIFUGAL LOW SPEED

- Maximum airflow at lower to medium static pressures
- Galvanized 12 GA steel housing that resists rust
- Adjustable feet to allow for leveling after installation
- Powder coated steel impeller

CENTRIFUGAL HIGH SPEED

- Airfoil precision-balanced steel blades ensure maximum airflow and efficiency
- Enclosed, fan cooled, electric motor

INLINE

- Steel constructed air-foil rotor
- Aerodynamically designed inlet cone
- Weatherproof electrical controls
- Heavy-duty, air-over cooled motor
- 3450 rpm



ARTICLE	DESCRIPTION
82920	3 hp Inline
312361	3 hp Centrifugal
513171	7.5 hp Centrifugal
518309	5 hp Centrifugal
80717	5 hp Inline
853151	7 hp Inline

FAN RECOMMENDATION GUIDELINE

Sidewall	Hopper Bottom	WHEAT		CANOLA	
		Dry min .75 cfm/bu	Aerate min .1 cfm/bu	Dry min .75 cfm/bu	Aerate min .1 cfm/bu
18'	1505	5 hp FC	3 hp IL or FC	7.5 hp FC ** 16'	3 hp IL or FC
18'	1805	7.5 hp FC	3 hp IL or FC	7.5 hp FC ** 16'	3 hp IL or FC
22'	2106	10 hp FC ** 20'	3 hp IL or FC	7.5 hp FC ** 18'	3 hp IL or FC
22'	2406	10 hp FC ** 18'	3 hp IL or FC	7.5 hp FC ** 16'	3 hp IL or FC
20'	1620 Smoothwall	7.5 hp FC	3 hp IL or FC	7.5 hp FC ** 16'	3 hp IL or FC


Sidewall	Hopper Bottom	WHEAT		CANOLA	
		Dry min .75 cfm/bu	Aerate min .1 cfm/bu	Dry min .75 cfm/bu	Aerate min .1 cfm/bu
18'	2705	15 hp LS ** 20'	3 hp IL or FC	Aeration only	5 hp IL or FC
25'	3307	2 x 25 hp LS ** 20'	5 hp IL or FC	Aeration only	7.5 hp IL or FC
25'	3607	2 x 30 hp LS ** 20'	5 hp IL or FC	Aeration only	7.5 hp FC or 7 hp IL
25'	4207	Aeration only	7 hp IL or 7.5 JP or FC	Aeration only	10 hp LS or FC or IL
29'	4808	Aeration only	10 hp or LS	Aeration only	10 hp LS or FC or IL
33'	4809	Aeration only	10 hp or LS	Aeration only	10 hp LS or FC or IL

*Above fan recommendations are basic guidelines only, further analysis may be required to ensure desired results. Other fan/bin combinations may also provide adequate airflows. Combinations shown are minimum requirements to achieve either Natural Air Drying (.75 cfm/bu) or Aeration (.1 cfm/bu). ** Maximum sidewall height to achieve desired airflow *Drying recommendations are based on the grain peak being removed or flattened. CFM/BU stands for cubic feet per minute of airflow through a bushel of grain. FC - Grain Guard high speed Full Centrifugal *IL - Grain Guard high speed In-Line Centrifugal LS - Grain Guard Low Speed Centrifugal

HEATER Grain Guard

Product: Heater

Incorporating a heater in your grain storage system can help remove moisture from grain and dry your grain faster. Fans allow for 24-hour drying. The heater is easily installed between fan and bin. Grain Guard low-temperature heater offers grain drying inside the bin by raising the ambient air temperature by 10-12°C and reducing relative humidity by 50%.

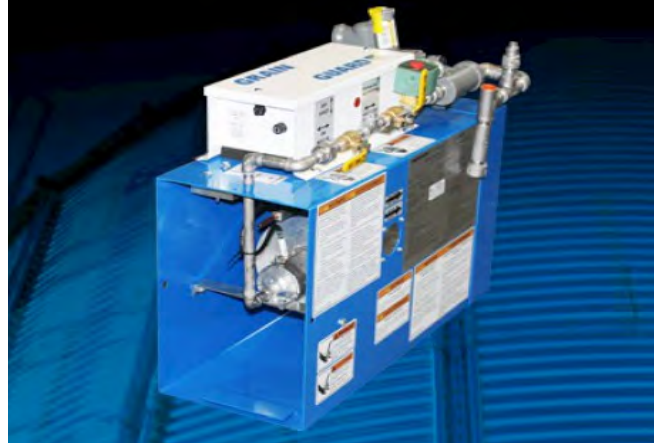

STANDARD OFFERING:

- Allows for harvesting of tough grain
- Extends available harvest periods
- Allows for early harvest
- Eliminate or manage spoilage of grain
- May improve grain grades
- Can be used with propane or gas

ARTICLE	PART	INLET	FAN RECOMMENDATION	BTU.
858780	GGH8351	9" x 14"	5 hp or 7hp (FC)	100,000
858799	GGH8352	18" Round	5 hp (IL)	60,000
858824	GGH8353	24" Round	5 hp or 7 hp (IL)	100,000

All heaters come with regulator only, hose and fittings not included. Natural gas heaters operate on pounds pressure not ounces.

HEATER RECOMMENDATION GUIDELINE

HEATER/FAN COMBINATION	14-16'	18-19'	21-22'	24-25'	27'
CANOLA					
GGH 8351					
5 hp Full Centrifugal	Optimum	Optimum	Optimum	Optimum	Acceptable
7.5 hp Full Centrifugal	Not Recommended	Optimum	Optimum	Optimum	Acceptable
GGH 8352					
3 hp Inline Centrifugal	Not Recommended	Not Recommended	Not Recommended	Optimum	Optimum
WHEAT					
GGH 8351					
5 hp Full Centrifugal	Optimum	Optimum	Acceptable	Acceptable	Acceptable
7.5 hp Full Centrifugal	Optimum	Optimum	Acceptable	Acceptable	Acceptable
GGH 8352					
5 hp Full Centrifugal	Optimum	Optimum	Acceptable	Acceptable	Not Recommended

	Optimum heater performance in these applications
	Acceptable heater performance in these applications
	Heater operation not recommended in these applications

ROCKET Grain Guard

Product: Vertical Air System

Grain Guard's Generation Rocket a vertical air system that can be installed permanently for effective conditioning and drying of grain. Grain Guard Retro Rocket fits through the manhole of bins with an 18.5" opening. It is a great option for old bins that do not have an aeration system.



STANDARD OFFERING:

- Smooth louvered surface allows for clean unload
- Up to 8% more louvered surface area
- Retro Rocket easy two-person install
- Improved performance through new design provides more air to centre of bin
- Improved design results in increased vertical loading up to 30' in grain height up to 40" on commercial Rocket

ARTICLE	PART NUMBER	DESCRIPTION	BUSHEL CAPACITY	BIN WALL HEIGHT (FT)
782914	GGR 8739	Rocket 7,000 8'	6,000	30'
782923	GGR 8737	Rocket 7,000 4'	3,500	30'
782932	GGR 8738	Rocket 7,000 6'	5,000	30'
1093669	GRS 7004	Retro Rocket 7,000 4'	5,000	30'
1093670	GRS 7006	Retro Rocket 7,000 6'	7,000	30'

GRAIN HANDLING



TRUCK AUGER AGI Westfield

Product: STX₂

Westfield's redesigned truck auger has been engineered to withstand the demands of farming today. The STX₂ was built for durability, longevity and capacity. With the STX₂, you'll get the job done fast.



STANDARD OFFERING:

- Belt tensioner is designed to engage and disengage the flighting adjustment without tools
- Self-leveling motor
- Wear Edge Technology on flighting at critical wear points
- High performance brake winch
- Heavier gearbox
- Flighting rolled directly to shaft
- Reversing gear box
- Soft start
- Clutch kit
- Battery/cable
- Light kit
- 15" tires

ARTICLE	PART NUMBER	DESCRIPTION	BATTERY MOUNT	HEAVY DUTY MOVER	ENGINE	BATTERY
1130452	STX20841SPCBM	STX2 8-41	Y	N	KOHLER 34 hp	N
1130453	STX20851SPCBM	STX2 8-51	Y	N	KOHLER 34 hp	N
1130454	STX21041SPHCBM	STX2 10-41	Y	Y	KOHLER 38 hp	N
1130455	STX21051SPHCBM	STX2 10-51	Y	Y	KOHLER 38 hp	N

Delivery charges apply.

TRUCKLOAD AUGER Meridian

Product: Belt Auger

Meridian's belt drive auger is one of the fastest, and quietest with a high level of safety. This high quality provides stability and versatility on the farm with efficiencies that get the job done faster. All hydraulic controls are at your finger tips.

STANDARD OFFERING:

- Square structural tubing on under carriage
- Self leveling motor mount
- Hardened sprouts, heavy duty roller bearings.
- Clutch kit
- More reach for going under Wide-Corr hopper bins
- High performance brake winch
- Heavier gearbox
- Flighting rolled directly to shaft
- Reversing gear box

ARTICLE	PART NUMBER	DESCRIPTION	ENGINE	SHOVEL
1104302	14080469800	HD 8-46	KOHLER 26.5 hp	Y
1104303	14080399801	HD 8-39	KOHLER 26.5 hp	Y
1104304	14100469800	HD 10-46	KOHLER 35 hp	Y
1104325	14100399800	TL 10-39	KOHLER 35 hp	Y

Delivery charges apply. Ask about our 48-hour access service.



- Light kit
- Battery/cable
- 15" tires
- Soft start clutch

U-TROUGH AUGER AGI Westfield

Product: UTX

Description: The UTX U-Trough Auger was built with resilience and longevity in mind- it's able to withstand the harshest physical demands. With a Vanguard 37 HP EFI motor, it can move 7000 to 9000 BPI.



STANDARD OFFERING:

- Wear Edge Technology™
- Durable Powder Coat Paint
- Removeable Tow Bar
- Solid Tube Guard
- Square One-Bolt Flight Connections
- Hydraulic Winch
- Triple Banded Belts
- Top Drive Chain Tensioner
- Triple-Groove Electric Clutch
- Reversing Gearbox
- Collapsing Spring Loaded Hopper Extension
- Heavy-duty self-propelled mover kit with joystick hydraulic steering

ARTICLE	PART NUMBER	DESCRIPTION	MOTOR	BELT
1137296	01-WFUTX4	U-Trough Auge	Vanguard 37hp EFI	Triple Banded

SWING AUGER AGI Westfield

Product: MKX Series

The MKX series features over 75 proved performance enhancements specializing in ease-of-use and serviceability. The MKX series is available in 10" and 13" tube diameters.



STANDARD OFFERING:

- Wear Edge technology
- 12-guage tube
- Long lasting powder coat paint
- Extended two-year warranty
- Heavy-duty cable or commercial strength steel trussing
- Six easily accessible service points
- Light kit

ARTICLE	PART NUMBER	DESCRIPTION	HOPPER (H" x L" x W")	HYDRAULIC WINCH	REMOTE ELECTRIC POWER SWING	TIRES
1130456	MKX1063CBR	MKX 10-63	40" x 66" x 15.75"	Y	Y	15"
1130457	MKX1073CBR	MKX 10-73	40" x 66" x 15.75"	Y	Y	15"
1130458	MKX1374CBR	MKX 13-74	48" x 66" x 14"	Y	Y	16"
1130459	MKX1384CBR	MKX 13-84	48" x 66" x 14"	Y	Y	16"

Delivery charges apply. Ask about our 48-hour access service.

SWING AUGER Meridian

Product: Swing Auger

Meridian's Swing Auger offers the lowest and longest hopper on the market. At just under 10 inches, its ideal for use with low profile trucks. The longer wider design maximizes reach. This design increase handling capacity and reduces spillage.



STANDARD OFFERING:

- Heavy duty gear box in feed auger and main tube can handle any delivery challenge
- Hopper lift accommodates left or right use on auger tube
- Transition enclosed from feed auger to main tube for less dust
- Hopper self-leveling drive system that turns Super-edge flighting auger toward center of hopper
- Scissor lift allows closer positioning to tall bins
- Roll form flight onto tube
- Longer lasting, smooth, quiet
- Light kit

ARTICLE	PART NUMBER	DESCRIPTION	HOPPER (H" x L" x W")	MOVER	HYD WINCH FOR SWING	TIRES
1105826	14001002205	SLMD 10-72	35.75" x 52" x 10.25"	Kramble 10" 12V Mover	Y	16"
1105832	14001202205	SLMD 12-72	52" x 41.5" x 13"	Kramble 12" 12V Mover	Y	16"
1105834	14001202605	SLMD 12-85	52" x 41.5" x 13"	Kramble 12" 12V Mover	Y	16"

Delivery charges apply. Ask about our 48-hour access service.

EMD AUGERS AGI Westfield

Product: EMD Auger

Westfield's 6" WR Series is better by design, featuring Wear Edge Technology on critical wear points to extend the life of the flighting and powder coat paint for a strong durable finish. Although the WR series is typically used in applications that require electric motor drive, Westfield offers more features and options than anyone else allowing the units to be customized to suit any situation. The WR series is available in lengths from 26' to 61' and capacities up to 1500BPH



6"	Gas HP	PTO HP	ELEC HP
26'	10	–	3
31'	10	–	3
36'	12	–	3
41'	12	–	3
46'	–	–	–
51'	–	20	5
56'	–	–	–
61'	–	25	7.5
71'	–	–	–

STANDARD OFFERING:

- 16 gauge tubing
- 7-7 1/2 inch electric motor pulley required for 1750RPM motors
- Limited two year warranty
- Double belt drive from gearbox to motor

ARTICLE	PART NUMBER	DESCRIPTION	UNDER CARRIAGE	INTAKE SHIELD	LUBRICATED UPPER DRIVE	FLIGHTING WEAR EDGE	WINCH	ELECTRIC MOTOR	SWIVEL KIT
1138551	01-0661EMD	WR 60-61 EMD	Y	Y	Y	Y	Y		
1138552	01-0636EMD	WR 60-36 EMD	Y	Y	Y	Y	Y		
1138553	010641EMD	WR 60-41 EMD	Y	Y	Y	Y	Y		

Recommended HP requirements. Best practice would be to recommend a 5HP motor where it says 3HP, 7.5HP where it says 5HP and 10HP where it says 7.5HP. I always over power the units to ensure we do not run into any power related issues as our recommendations are based on dry grain.

AUGER ACCESSORIES

The Never Spill Spout sounds an alarm when your bin is full, preventing spillage! Never offer fill a bin again! Never climb a bin ladder to check how full it is! Never plug another auger! No need for individual bin indicators! Never spill another bushel!

ARTICLE	DESCRIPTION	SIZE
1136435	Never Spill Spout	10"
1136436	Never Spill Spout	12" - 14"
1136437	Never Spill Spout	16"
1136438	Cable Extension	30'



CONVEYOR Meridian

Product: Conveyor

At up to 12,000 bushels per hour, these conveyors come with a 10" diameter tube and a 20" wide belt. The unique bottom hopper virtually eliminates leakage. They're great for loading trucks on the farm or at the seed plant and for filling the air seeder cart in the field. With its high capacity and gentle handling of your commodity you can save time and money with the Truck Loader Series.

STANDARD OFFERING:

Standard Offering:

- 10" tube, 20" belt
- 4 wheel hydraulic mover with joy stick power steering
- 5' low profile collapsible intake hopper
- Electric clutch
- Gas or electric belt drive
- Hydraulic lift
- Adjustable spout
- Removable drawbar hitch



ARTICLE	PART NUMBER	MODEL	REACH	DRIVE
1134033	14200451200	20-45 Gas-w/Mover	19'	35HP Vanguard

CONVEYOR AGI Batco

Product: Belt Conveyor

BATCO belt conveyors are built tough to perform, yet designed and engineered for gentle handling of delicate seeds and commodities including fertilizer.



STANDARD OFFERING:

- Protects grade quality and germination performance of seed.
- Built for rugged, long-lasting performance with heavy-duty features.
- Built for high capacity and performance.
- Requires half the horsepower of screw augers, saves energy and frees up larger tractors for other uses.
- Require very little clean out when changing from one commodity to another; saving growers time and reducing contamination.

ARTICLE	PART NUMBER	DESCRIPTION	ANGLE INDICATOR	S-DRIVE TENSIONER	JOY-STICK STEERING	LIGHT KIT	GRIP TIRES	HEAVY DUTY MOVER	32HP MOTOR	BATTERY KIT
1135264	BCX2 1549 FL FMD	1549 Field Loader Top Mount	Y	Y	Y	Y	Y	Y	Y	Y

Delivery charges apply. Ask about our 48-hour access service.

SEED TREATER AGI Westfield

Product: Storm FX Seed Treater

Take the guesswork out of seed treating. The STORM FX accurately measures untreated seed directly from the bin, precisely meters and applies the seed treatment, gently mixes the seed for consistent, even coverage and then transfers the treated seed into the truck, ready to plant. The simplified process provided by the STORM FX reduces user exposure, making in-the-yard seed treating safe, simple and convenient, while giving you total control over the seed treating process.



STANDARD OFFERING:

- Treating speed of 15 to 30 bu/min (900 to 1800 lbs/min @ 60 lbs/bu)
- Quick bin-to-bin movement
- Hydraulically powered 41' long x 10' mixer equipped with poly-cupped flighting. Reversible for easy clean out.
- Four nozzles
- Apply two separate liquid products at one time
- Patented direct meter from bin technology

ARTICLE	PART NUMBER
1130074	440020021

Check out our other reference guides:

Canola • Corn • Soybean Varieties

Forage • Corn • Range & Pasture

Seed Treatment • Inoculants

Essential Nutrients

Contact your local Customer Account Manager to GET A QUOTE

Visit [UFA.com/Quote](https://www.ufa.com/Quote)

